


Sonneteer

Byron

Your Sonneteer Byron is a multibit Delta Sigma CD player with digital output (for future upgradability) and is fully remote controllable.


The front panel controls

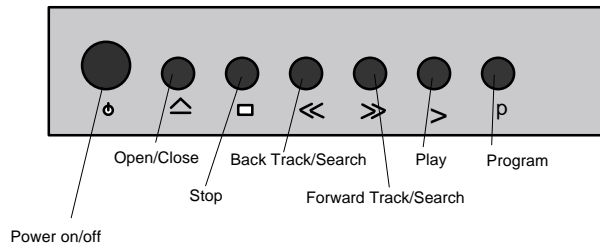

Remote Control Functions

Pause	Holds track at present position of play
Volume	Decrease and increase sound level.
Shuffle	Plays back tracks in random order
Scan	Plays beginning of each track
Repeat	Repeats current track
Tray open	Open and closes the disc loading tray

Note:
Both DISC and PROG. button on the remote have no function in this model

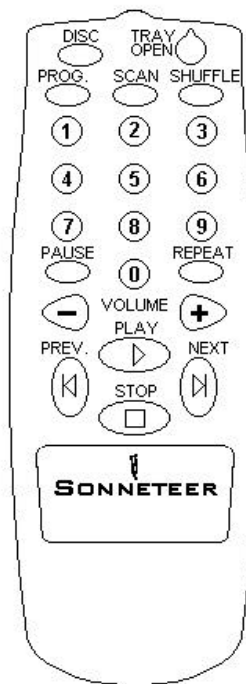

Program

You can store 30 tracks from each CD in any required sequence. Full comes up on the display if you exceed this maximum.

In Stop mode press Program to open the memory. The program light will start flashing.

Use the track select buttons to select first track.

Press Program again. The track number will be stored in memory.

Select the next track in the same way. The total time and the track numbers will show on the display.

To play program, press Play.

To erase program press Stop twice during playback or once in stop mode.

n on

Frequency response	2Hz - 20kHz
Dynamic range	96dB
Analogue output level	1.95V
Digital output	S/PDIF
Size (mm)	434 x 74 x 280

Fuse Values:

UK/Europe/Australasia: 230V/240V; T 1.25 Amp
USA/Canada 110V/120V, T 2.0 Amp

Due to continuous development specifications may change without prior notice.

If a fault occurs refer to your dealer.


Sonneteer

P.O. Box 163C, Esher, Surrey, KT10 0YH, England.
www.sonneteer.co.uk